


ITALIAN
COOLING
SOLUTIONS

 HiRef

TELEKOM KYLA

2020

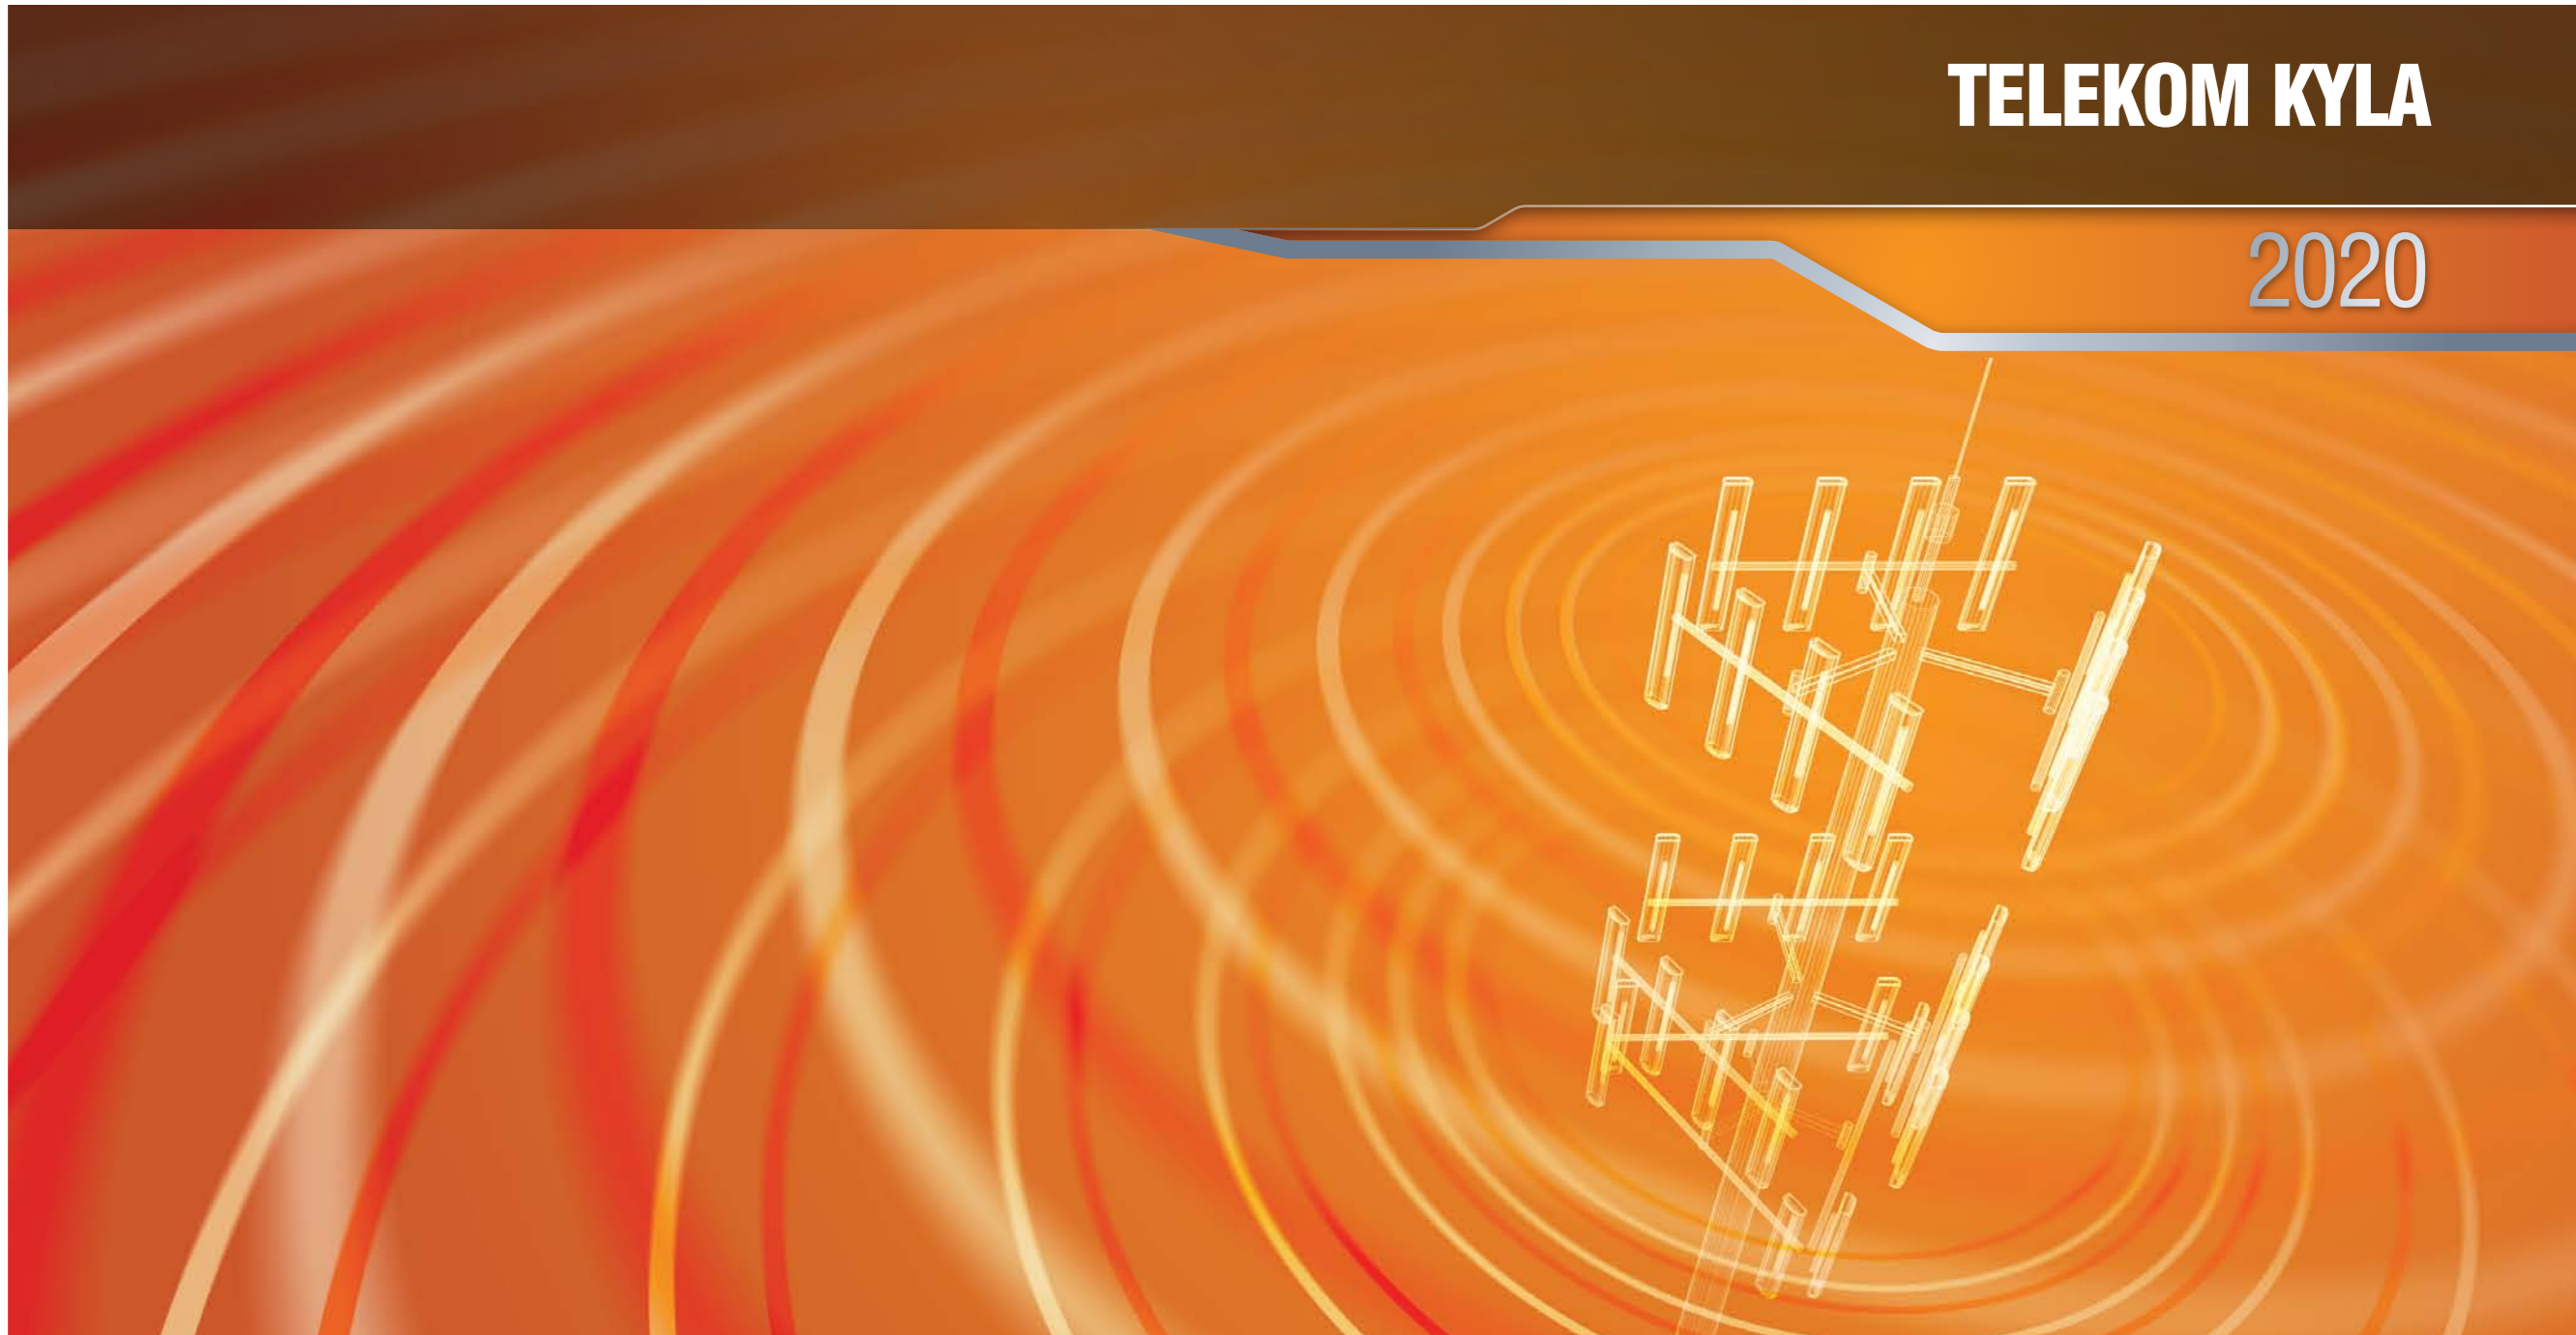

 HiRef

HiRef S.p.A.
Viale Spagna, 31/33
35020 Tribano (PD) Italy
Tel. +39 049 9588511
Fax +39 049 9588522
e-mail: info@hiref.it
www.hiref.it

HiRef S.p.A. reserves the right to change the specifications and other information contained herein without notice. No part of this publication may be reproduced without the prior written permission of HiRef S.p.A.

© Copyright HiRef S.p.A. 2020



HF65000100 rev.E

TELEKOM KYLA 2020



	VERSION	KÖLDMEDIUM	KYLEFFEKT	LUFTRIKTNING
NTG	MONOBLOC INOMHUSPLACERADE MED ON-OFF BLDC TWIN ROTATIONS KOMPRESSORER DX	R-410A	3 - 9 (kW)	DISPLACEMENT
HTWD	MONOBLOC UTMHUSPLACERADE MED ON-OFF ROTATIONS ELLER SCROLL KOMPRESSORER DX	R-410A R-407C R-134a	4 - 14 (kW)	NERÅTBLÅSANDE
NTWD	MONOBLOC UTMHUSPLACERADE MED BLDC SCROLL KOMPRESSORER DX	R-410A	8 - 11 (kW)	NERÅTBLÅSANDE
HTD	MONOBLOC INOMHUSPLACERADE MED ON-OFF ROTATIONS ELLER SCROLL KOMPRESSORER DX	R-410A R-407C R-134a	4 - 28 (kW)	NERÅTBLÅSANDE
HTU	MONOBLOC INOMHUSPLACERADE MED ON-OFF ROTATIONS ELLER SCROLL KOMPRESSORER DX	R-410A R-134a	4 - 28 (kW)	UPPÅTBLÅSANDE
HTX	MONOBLOC INOMHUSPLACERADE MED ON-OFF ROTATIONS ELLER SCROLL KOMPRESSORER DX	R-410A R-407C R-134a	4 - 28 (kW)	DISPLACEMENT
NTD	MONOBLOC INOMHUSPLACERADE MED BLDC SCROLL KOMPRESSORER DX	R-410A	4 - 30 (kW)	NERÅTBLÅSANDE
NTU	MONOBLOC INOMHUSPLACERADE MED BLDC SCROLL KOMPRESSORER DX	R-410A	4 - 30 (kW)	UPPÅTBLÅSANDE
NTX	MONOBLOC INOMHUSPLACERADE MED BLDC SCROLL KOMPRESSORER DX	R-410A	4 - 30 (kW)	DISPLACEMENT

	VERSION	KÖLDMEDIUM	KYLEFFEKT	LUFTRIKTNING
HTW	MONOBLOC UTMHUSPLACERADE MED ON-OFF ROTATIONS ELLER SCROLL KOMPRESSORER DX	R-410A R-407C R-134a	4 - 32 (kW)	UPFLOW
NTW	MONOBLOC UTMHUSPLACERADE MED BLDC SCROLL KOMPRESSORER DX	R-410A	8 - 20 (kW)	UPFLOW
HTR	TELECOM ROOFTOP MED ON-OFF SCROLL KOMPRESSORER DX	R-410A R-407C R-134a	7 - 33 (kW)	VERTIKAL AIRFLOW
NTR	TELECOM ROOFTOP MED BLDC SCROLL KOMPRESSORER DX	R-410A	7 - 33 (kW)	VERTIKALT AIRFLOW
HTI CW	CHILLED WATER PACKAGED AIR CONDITIONING UNIT CW	WATER	3 - 35 (kW)	VERTIKALT HORIZONTALT
HTS	TELECOM SPLIT UNIT MED ON-OFF ROTATIONS ELLER SCROLL KOMPRESSORER DX	R-410A R-407C R-134a	3 - 39 (kW)	VERTIKALT HORIZONTALT
NTS	TELECOM SPLIT UNIT MED BLDC SCROLL KOMPRESSORER DX	R-410A	8 - 16 (kW)	VERTIKALT HORIZONTALT
FREE COOLER BOX	INNE/UTE FREE COOLER MED RADIALFLÅKTAR LUFTFLÖDE 1500 - 3000 6000 - 10000 (m³/h)			LUFTRIKTNING HORIZONTALT LUFTFLÖDE

KYLEFFEKT
 TLC DX: Omgivningstemperatur 27°C, 40% r.h.; Ute temp 35°C
 TLC CW: Omgivningstemperatur 27°C, 40% r.h., Tw = 10/15 °C

Technical data are subject to change without notice. Please do not use these data for the design phase.